



STRELOK PRO HIDDEN FEATURES

Heads-Up Display – On the home page, press and hold the *Calculate* button to display a simplified version of the *Home Page*, an easier to read display of the turret values. The shooter can also change the distance and wind parameters from this window.

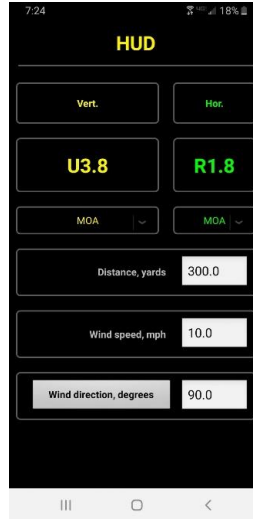


Hide Angular Measurement(s) - On the home page, press and hold the *turret adjustment* column number, e.g., MOA, if the shooter wants that measurement not to be visible or to reappear.

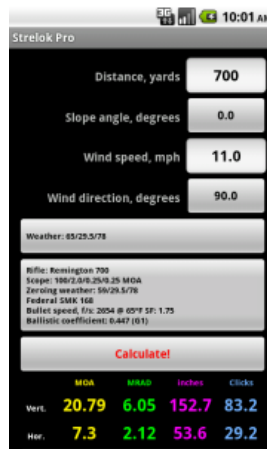


Clicks/Turret Setting - On the home page, tap the *Clicks/Turret Setting* (far right column) to will toggle between 1-3/4 format and clicks.




Cartridge Quick-Change Option - On the home page, press and hold the *Rifle and Cartridge Information* to present a drop-down menu of available cartridge loads.

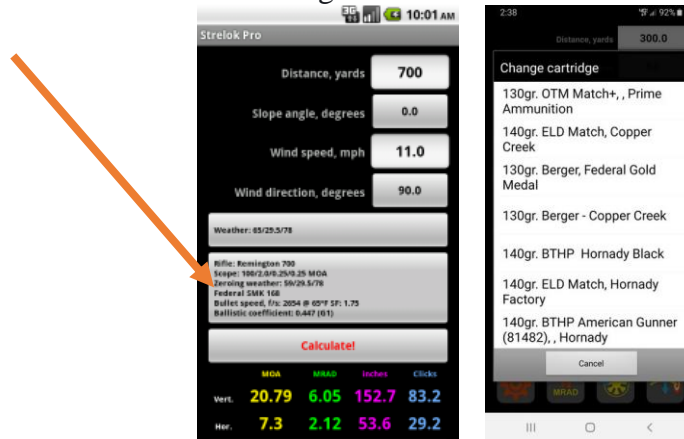


Use Camera to Set Slope Angle - First, within the Strelok *Main Settings* (gear icon), ensure the *Use Camera for Slope Angle* option is checked. On the home page, tap the *Slope Angle* field. Pointing the camera lense toward the *Line-Of-Sight*, place the crosshair on the target and press "OK." Strelok will enter the slope measurement, e.g., -11 degrees, into the field. Selecting "0" will zero out the slope-angle field.

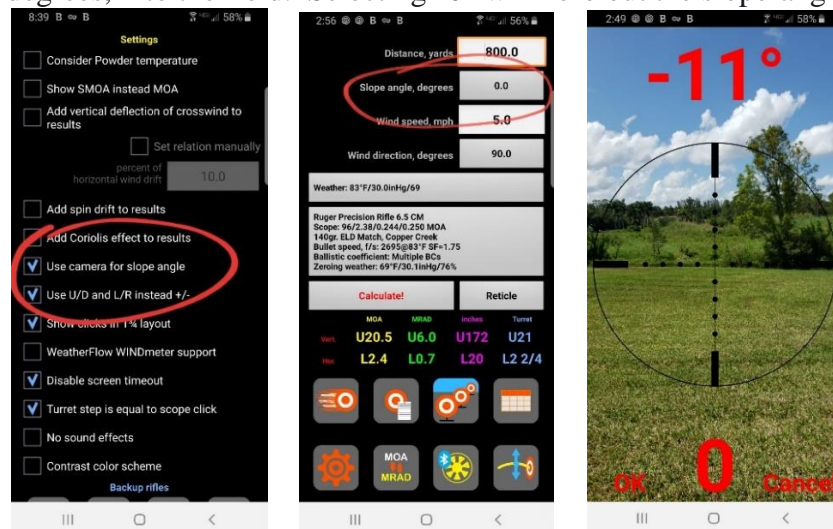

Reticle Windage Display – Within the reticle display page, using three fingers simultaneously, tap to toggle presenting, or not, wind lines for 2, 5, and 10 MPH/KPH. This feature will only be available with “Christmas Tree” type reticles.

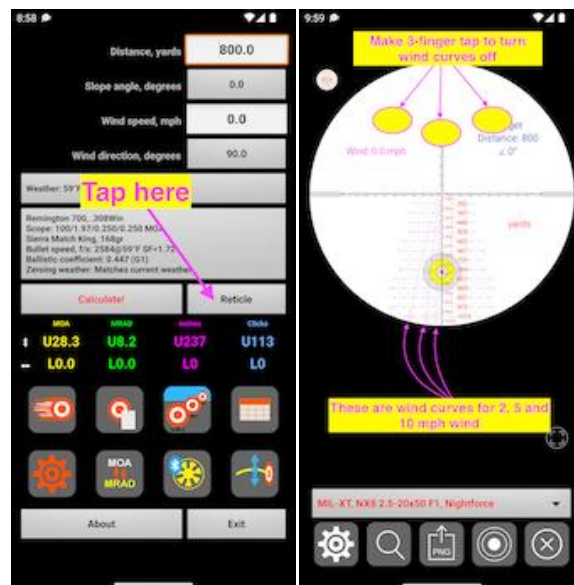

Reticule Display Toggles –

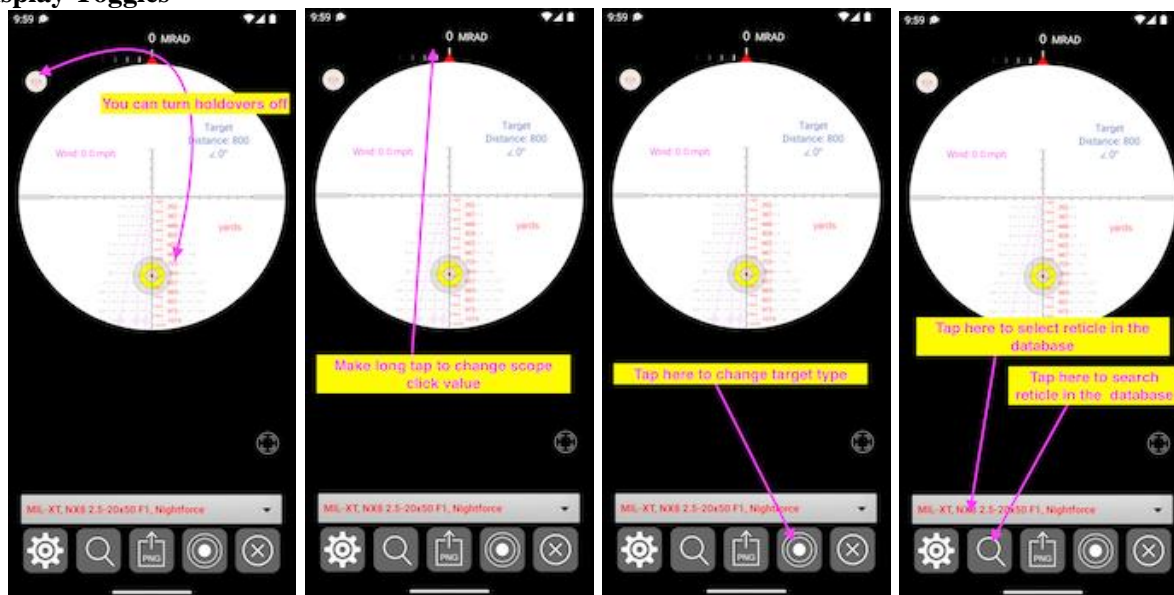

3-Tier Truing Function - Most people are aware of the single-value Ballistic Truing function, which is accessed by tapping the lower-right icon on the home screen. To access the *3-Tier* function, press and hold the icon for a couple of seconds and then release.

